

## ad notam LCD TV-SERIES

TV 37.0"

MIRROR IMAGE® is the engine that drives images through glass and mirror to deliver superb picture quality. All products are German made, custom-engineered, LCD technology. They are exclusively designed to overcome the unique challenges of operating in ventilation deprived environments and to allow easy and adjustable mounting. The optional unique magnet mounting system accompanying all products is distinctively designed to suit all particularized placements behind any glass surfaces.

When combined with MAGIC MIRROR®, MIRROR IMAGE® switches completely invisible when turned off. MIRROR IMAGE® technology is patent protected.


The TV LINE is the absolute high-end multifunctional flush fitted monitor solution from ad notam®. This line is equipped with all the features of the HD LINE, in addition to an integrated TV tuner.



### PRODUCT HIGHLIGHTS

- Flush fitted monitor
- Enhanced picture quality
- Low Voltage
- Doesn't require ventilation
- Sealed casing
- Ultra slim profile
- Magnetic mounting system allows for easy installation and removal (optional)
- LCD Technology
- Auto signal detection logic
- Optional RF remote control (no IR eye needed)
- DOG system architecture
- Adjustable mounting system for particularized placement


### Article No.:

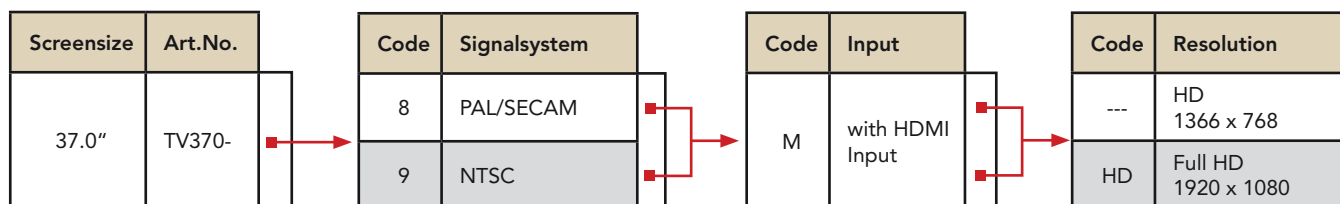

## ad notam LCD TV-SERIES

TV 37.0"

### Technical Datasheet:

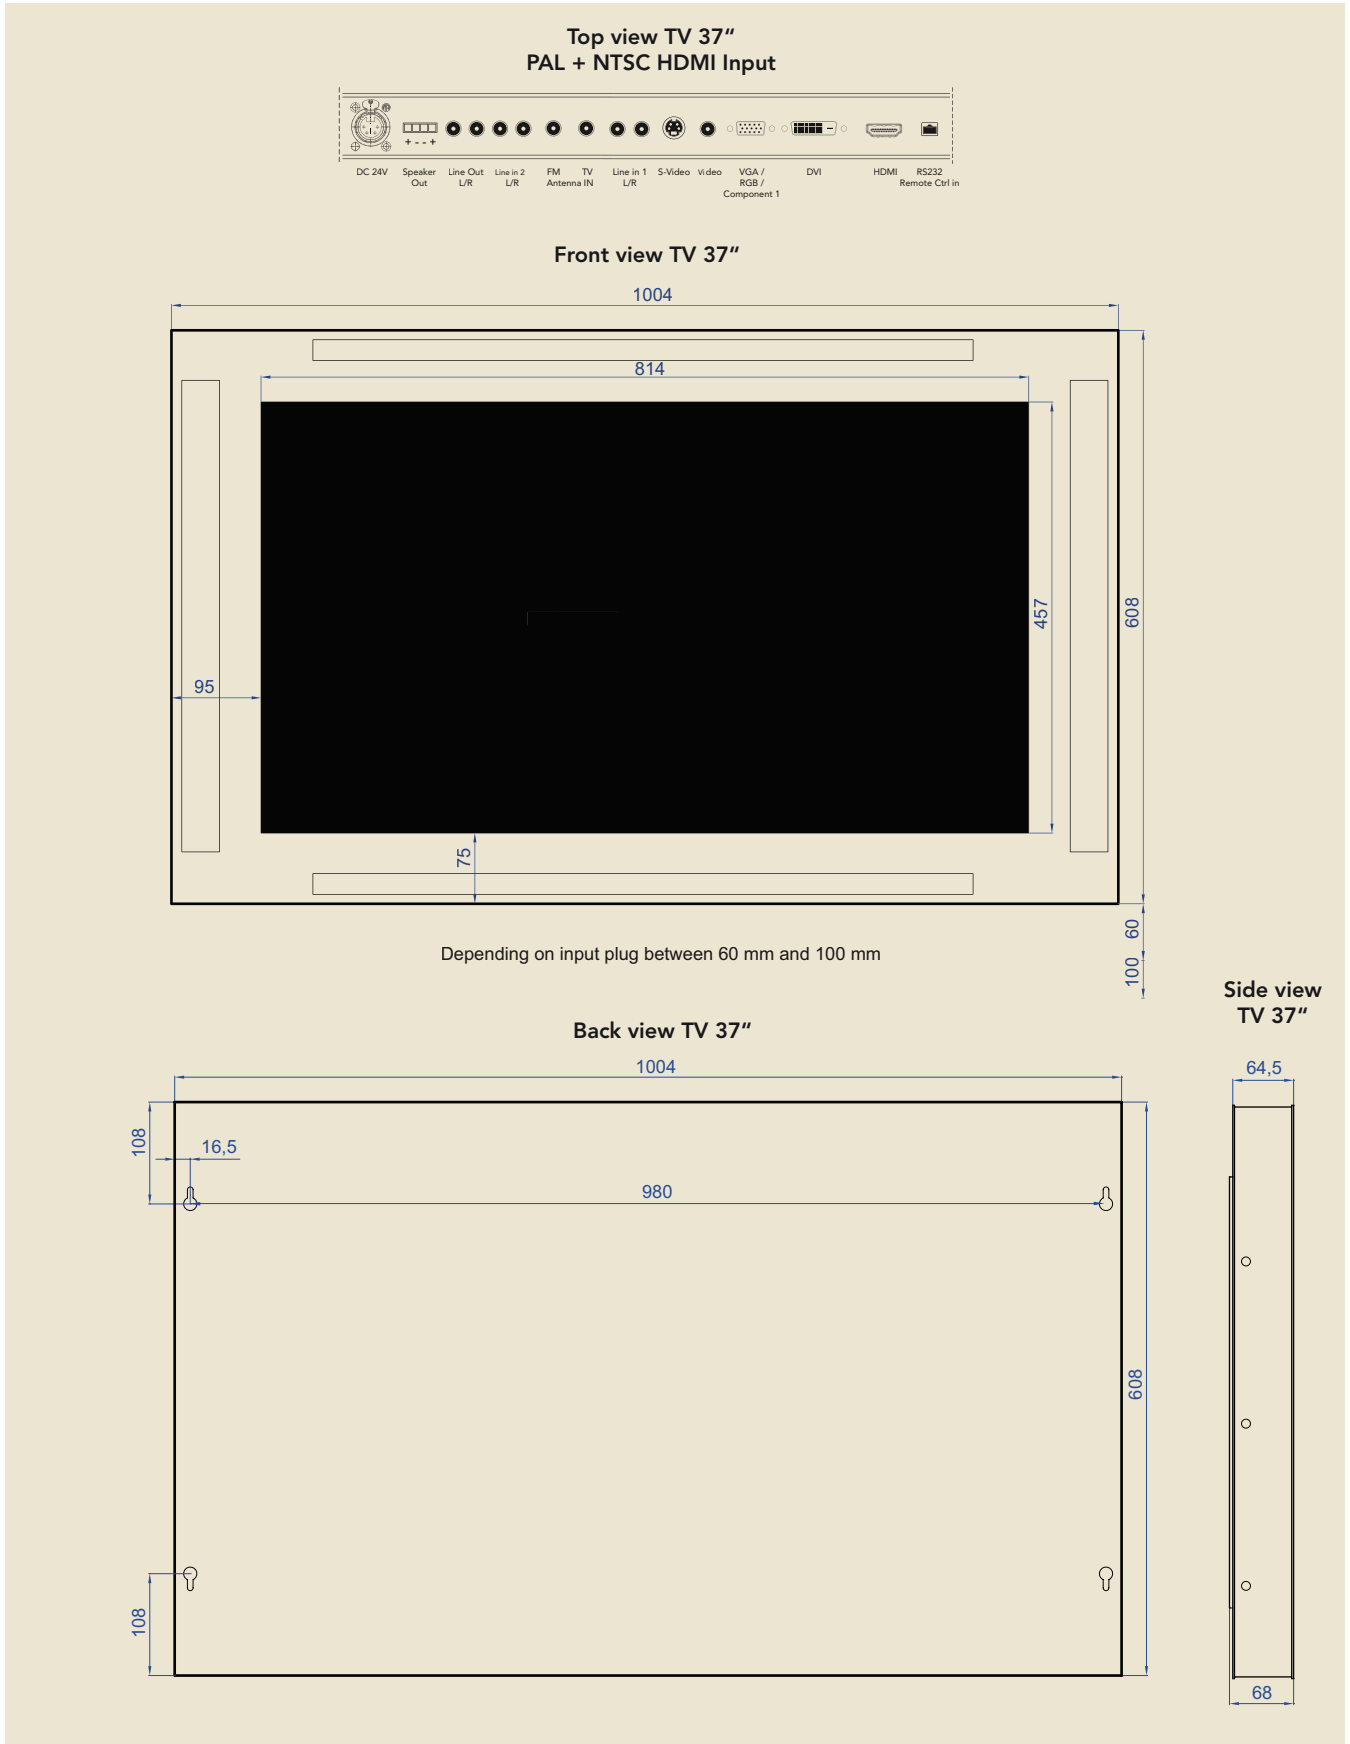

## ad notam LCD TV-SERIES

TV 37.0"

## Screen technology:


Art.No. / Features	TV 370-8 M	TV 370-8 M HD	TV 370-9 M	TV 370-9 M HD
<b>Display Type</b>	TFT Thin Film Transistor	TFT Thin Film Transistor	TFT Thin Film Transistor	TFT Thin Film Transistor
<b>Active Screen Area</b>	W x H 814 x 457 mm 32,05" x 17,99" Diagonal 940 mm / 37"	W x H 814 x 457 mm 32,05" x 17,99" Diagonal 940 mm / 37"	W x H 814 x 457 mm 32,05" x 17,99" Diagonal 940 mm / 37"	W x H 814 x 457 mm 32,05" x 17,99" Diagonal 940 mm / 37"
<b>Picture Format</b>	16:9 (HDTV via VGA)	16:9 (HDTV via VGA)	16:9 (HDTV via VGA)	16:9 (HDTV via VGA)
<b>Physical Resolution</b>	1366 x 768	1920 x 1080	1366 x 768	1920 x 1080
<b>Viewing Angle</b>	Horizontal 176 Vertical 176	Horizontal 176 Vertical 176	Horizontal 176 Vertical 176	Horizontal 176 Vertical 176
<b>Brightness</b>	600 cd/m2	600 cd/m2	600 cd/m2	600 cd/m2
<b>Contrast</b>	static 500 : 1 / dynamic 3000	static 500 : 1 / dynamic 3000	static 500 : 1 / dynamic 3000	static 500 : 1 / dynamic 3000
<b>Response Time</b>	8 ms	8 ms	8 ms	8 ms
<b>Inputs</b>	TV (analogue), DVI, AUDIO LINE IN 1/2 (L/R), AUDIO OUT, SPEAKER OUT, Y/C, RGB-S, RGB (VGA, SVGA, XGA, SXV- GA, UXGA), VGA, FBAS, RJ45, HDMI (HDCP 1.3)	TV (analogue), DVI, AUDIO LINE IN 1/2 (L/R), AUDIO OUT, SPEAKER OUT, Y/C, RGB-S, RGB (VGA, SVGA, XGA, SXV- GA, UXGA), VGA, FBAS, RJ45, HDMI (HDCP 1.3)	TV (analogue), DVI, AUDIO LINE IN 1/2 (L/R), AUDIO OUT, SPEAKER OUT, Y/C, RGB-S, RGB (VGA, SVGA, XGA, SXV- GA, UXGA), VGA, FBAS, RJ45, HDMI (HDCP 1.3)	TV (analogue), DVI, AUDIO LINE IN 1/2 (L/R), AUDIO OUT, SPEAKER OUT, Y/C, RGB-S, RGB (VGA, SVGA, XGA, SXV- GA, UXGA), VGA, FBAS, RJ45, HDMI (HDCP 1.3)
<b>Operating Temperature</b>	5 to 50 Celsius / 41 to 122 Fahrenheit	5 to 50 Celsius / 41 to 122 Fahrenheit	5 to 50 Celsius / 41 to 122 Fahrenheit	5 to 50 Celsius / 41 to 122 Fahrenheit
<b>Power</b>	DC 24V 200 W / 8400 mA	DC 24V 200 W / 8400 mA	DC 24V 200 W / 8400 mA	DC 24V 200 W / 8400 mA
<b>Weight</b>	20,4 kg	20,4 kg	20,4 kg	20,4 kg
<b>Amplifier Output</b>	4 x Phoenix-clip, 25W RMS@4 Ohm per Channel	4 x Phoenix-clip, 25W RMS@4 Ohm per Channel	4 x Phoenix-clip, 25W RMS@4 Ohm per Channel	4 x Phoenix-clip, 25W RMS@4 Ohm per Channel
<b>Equalizer</b>	5-Band	5-Band	5-Band	5-Band
<b>Tuner Receiver</b>	CCIR, PAL-SECAM B/G, D/K, PAL I, SECAM L/L'	CCIR, PAL-SECAM B/G, D/K, PAL I, SECAM L/L'	NTSC	NTSC
<b>Tuner Channels</b>	99	99	99	99
<b>Receivable Tuner Channels</b>	VHF/ UHF Ch. E2-E12, CATV Hyperband, Ch. S01-S41	VHF/ UHF Ch. E2-E12, CATV Hyperband, Ch. S01-S41	CATV Ch.1-124	CATV Ch.1-124
<b>FM Radio</b>	yes	yes	yes	yes
<b>Image flip</b>	180° selectable	180° selectable	180° selectable	180° selectable
<b>Interactive Port RJ45</b>	IR/RF Input RS 232 (optional) LED control (optional) Power control (optional) HDMI switch (optional)	IR/RF Input RS 232 (optional) LED control (optional) Power control (optional) HDMI switch (optional)	IR/RF Input RS 232 (optional) LED control (optional) Power control (optional) HDMI switch (optional)	IR/RF Input RS 232 (optional) LED control (optional) Power control (optional) HDMI switch (optional)
<b>Remote Control Code</b>	definable	definable	definable	definable

## ad notam LCD TV-SERIES

TV 37.0"

### Power supply:

Power	Voltage		Type	Operating Temperature
	IN	OUT		
216 W / 9 A	90 – 264 Vac	24 V DC	NE-T 216	0 - 40 °C

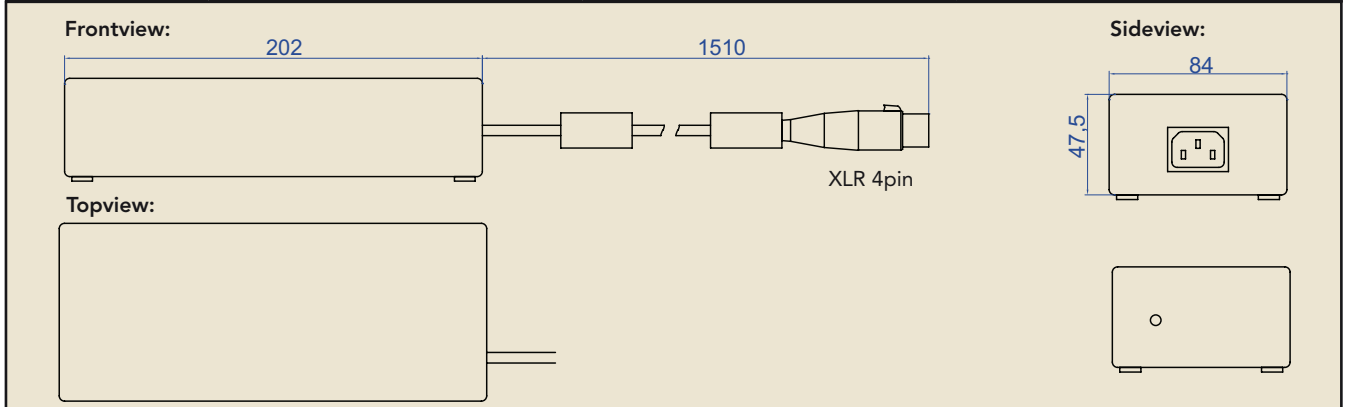

### Remote Control Slimline:

Type	Color	Dimensions B x H x D
IR Infrared	Black	225 x 45 x 16 mm 8.9" x 1.8" x 0.6"

